


## 23 - Body / Door - Front / PANEL, Door Trim, Reflector/Removal and Installation

### REMOVAL AND INSTALLATION

✚ **Labor Operations:** Click to display a list of Labor Operations associated with this procedure

#### REMOVAL

1. Insert a screwdriver in the recess (1a) and remove the reflector (1b) by disengaging the flexible retainer (1c) and the rigid retainer (1d).

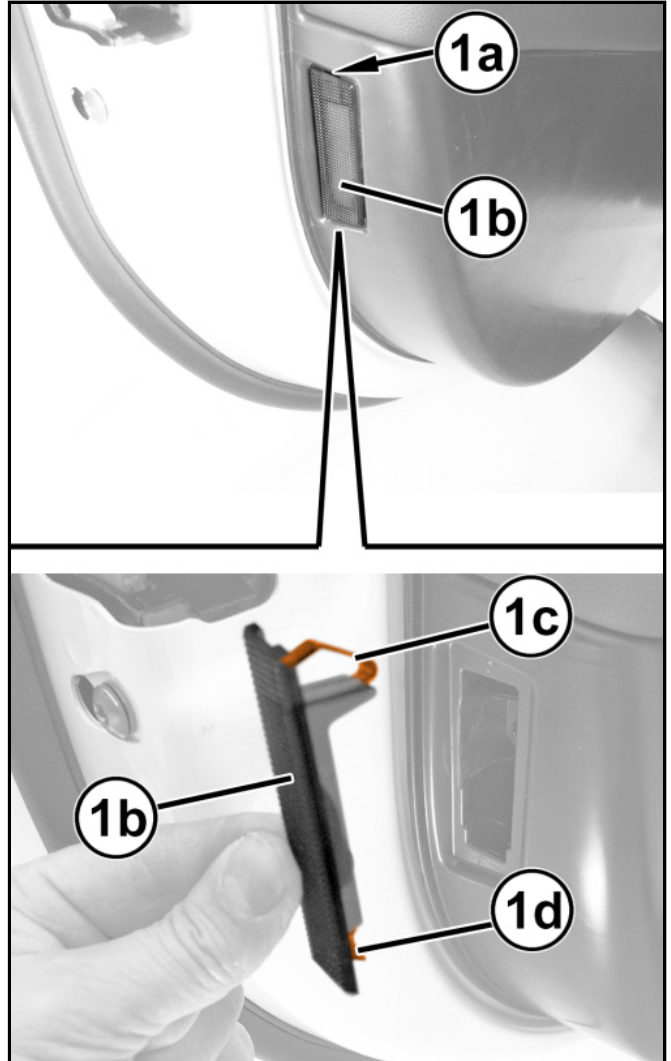

#### INSTALLATION

1. Position the reflector (1a) and engage its retainers (1b, 1c).

